

6AY3

Half-Wave Vacuum Rectifier

NOVAR TYPE
For Television Damper Service

GENERAL DATA

Electrical:

Heater Characteristics and Ratings:

Voltage (AC or DC)	6.3 ± 0.6	volts
Current at heater volts = 6.3	1.200	amp
Peak heater-cathode voltage:		
Heater negative with respect to cathode ^a	5000 ^b	max. volts
Heater positive with respect to cathode	300 ^c	max. volts


Direct Interelectrode Capacitances (Approx.):^d

Plate to cathode and heater	6.5	pf
Cathode to plate and heater	9.0	pf
Heater to cathode	2.8	pf

Mechanical:

Operating Position	Any
Type of Cathode	Coated Unipotential
Maximum Overall Length	3.410"
Maximum Seated Length	3.030"
Length, Base Seat to Bulb Top (Excluding tip)	2.510" to 2.690"
Diameter	1.062" to 1.188"
Bulb	T9
Socket	Cinch Mfg. Co. No. 149 19 00 033, Industrial Electronic Hardware Corp. No. S0-0968-SL1, or equivalent
Base	Small-Button Novar 9-Pin (JEDEC No. E9-75)
Basing Designation for BOTTOM VIEW	9HP

Pin 1-Do Not Use^e
Pin 2-Plate
Pin 3-Do Not Use^e
Pin 4-Heater



Pin 5-Heater
Pin 6-Do Not Use^e
Pin 7-Plate
Pin 8-Do Not Use^e
Pin 9-Cathode

DAMPER SERVICE

Maximum Ratings, Design-Maximum Values:

For operation in a 525-line, 30-frame system^f

PEAK INVERSE PLATE VOLTAGE ^a	5000	max. volts
PEAK PLATE CURRENT	1100	max. ma
DC PLATE CURRENT	175	max. ma
PLATE DISSIPATION	6.5	max. watts

^a This rating is applicable when the duration of the voltage pulse does not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

← Indicates a change.




RADIO CORPORATION OF AMERICA
Electron Tube Division
Harrison, N. J.

DATA 1
7-63

6AY3

- b The dc component must not exceed 900 volts.
- c The dc component must not exceed 100 volts.
- d Without external shield.
- e Socket terminals 1, 3, 6, and 8 should not be used as tie points. It is recommended that the socket clips for these pins be removed to reduce the possibility of arc-over and to minimize leakage.
- f As described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations," Federal Communications Commission.

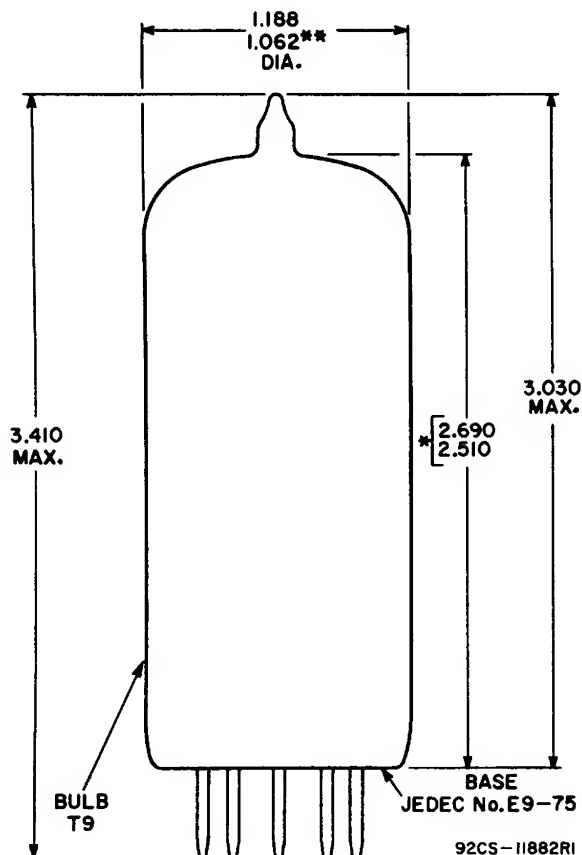

ALL DIMENSIONS IN INCHES

** APPLIES IN ZONE STARTING 0.375" FROM BASE SEAT.

* MEASURED FROM BASE SEAT TO BULB-TOP LINE AS DETERMINED BY A RING GAUGE OF 0.600" INSIDE DIAMETER.


RADIO CORPORATION OF AMERICA
Electron Tube Division

Harrison, N. J.



6AY3

AVERAGE PLATE CHARACTERISTIC

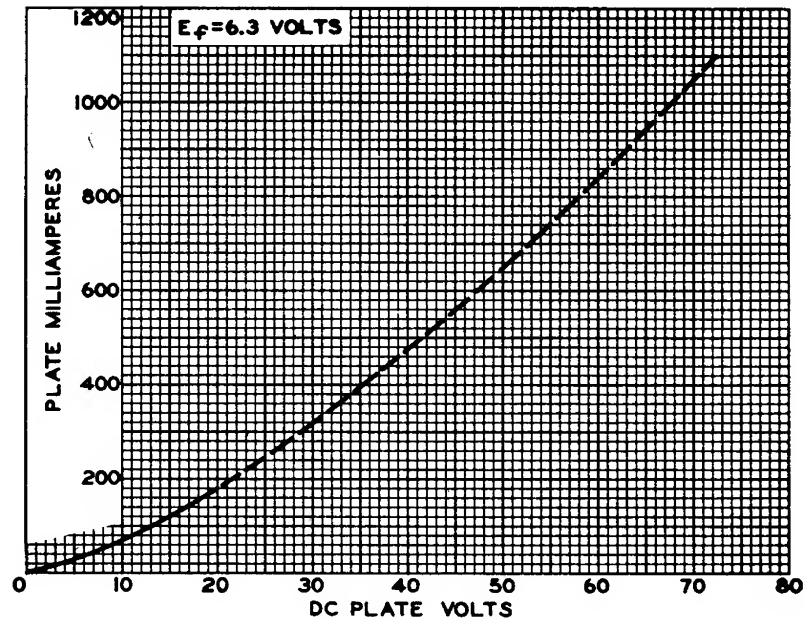

92CS-9884



RADIO CORPORATION OF AMERICA
Electron Tube Division
Harrison, N. J.

DATA 2
7-61